
Thermal Gradient Ring Thermal preference phenotyping for tethered and non-tethered mice









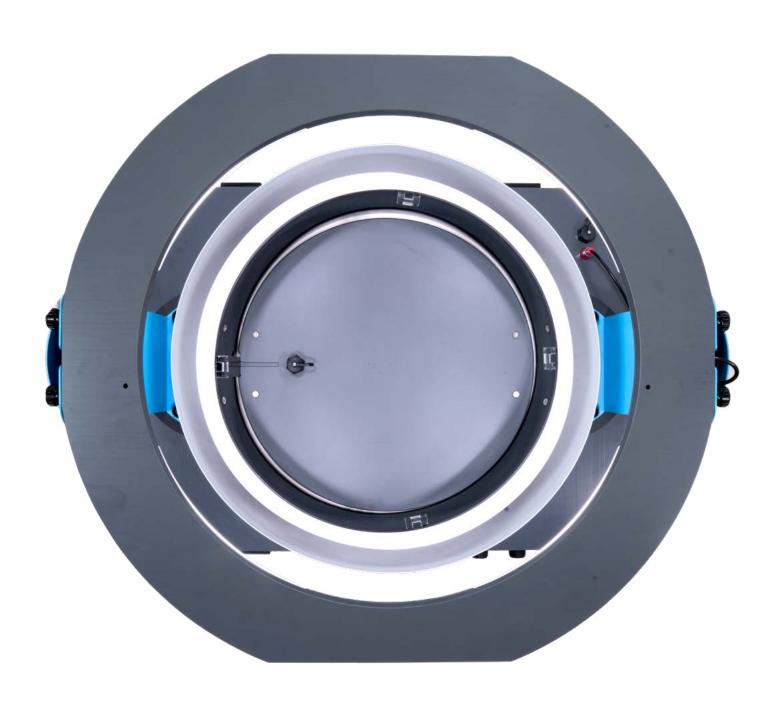







Thermal Gradient Ring (TGR) version 2

Best Choice for thermal preference phenotyping and drug screening in mice. Fully automated temperature preference and temperature avoidance. Increased thermal test sensitivity and accurancy.

Out-of-the box apparatus ready to use in ANY-Maze software.

2

3

Thermal Gradient Ring 2

Thermal Gradient Ring 2

1 Adjustable swivel holder

We support most of the available swiwel on the market, just let us know the one You plan to use.

2 Guidance for animal cable



Disk guide for the cable of tethered mice on the top of the central camera holder. Easy set-up change for tethered and non-tethered mice.

3 New design of maze walls

2 wall height available Easy and fast de-mounting for cleaning (needed when chaging animal)

4 Automatic start timer

To let apparatus be ready when You come to the Lab

Background

- The TGR invention paper showed how circular design allowed to dissect exploratory behaviour from thermal selection (2016, F. Touska et al.)
- The novel circular thermal gradient assay opens new opportunities for thermal preference and avoidance and addresses limitations imposed by classic linear equipment.
- The TGR can clearly discriminate temperature-dependent phenotypes or drug effects and its advantages over other techniques (i.e. linear corridors, two-choice temperature preference) are well described in the 2024 paper "Thermal gradient ring for analysis of temperature-dependent behaviors involving TRP channels in mice" (Ujisawa et al. (Prof. Tominaga Lab).

Typical device applications

The TGR has been used to study sensory neuropathies (2020, Valek et al.), diabetic peripheral neuropathy with symptoms of the thermosensoryimpairment (2022, Sasajima), TRP channels (2022, Ujisawa) and CCI-induced thermal hyperalgesia.

The TGR records and analyses thermal preference phenotyping in mice. For neuropathic pain studies,

peripheral neuropathy, temperature sensitivity and insensitivity assessment in basic research, phenotyping and drug screening.

The new version is designed to use also cabled animals for optogenics, electrophysiology and other techniques which require the use of wires.

Product Description

In the TGR, mice can freely move around the ring, thereby avoiding the stereotypical habit that mice have of staying in a corner, as occurs in rectangular systems.

An infrared camera is located on the upper side of the apparatus, together with a visible and infrared illuminator and an infrared transmissive inner wall.

The animal is freely moving and its position is tracked by the camera, and no user intervention is required to gather time spent in each temperature zone (12 zones in duplicate) and many other parameters.

The behavioral data is obtained by video-tracking with

ANY-Maze software and generate measurement parameters, such as:

- Thermal zone occupancy: percentage of time spent in a zone
- Zone entries: number of entries in each zone.
- Preference temperature: calculated as the weighted preferred temperature.
- Cumulative distance: calculation of the cumulative distance per zone or per the whole apparatus.
- Coordinates of location within the Ring: can be used to visualize mouse behaviour in the ring with Heat Maps.



Temperature controlled cabinet (-10/+100 °C range temperature) to hold up to two Thermal Gradient Rings under constant temperature and sound isolation, to be not depending on of the lab room temperature (optional item)



ANY-Maze Video-tracking software automatically analyses thermal preference and avoidance parameters.

A dedicated (TGR limited) ANY-Maze software version is available at a lower price than the ANY-Maze full version and also includes TGR protocol ready to use

| Features | B enefits |
|---|---|
| Circular maze design | Duplicate values, no border effects, no spatial cues |
| New design which includes swivel support and has no obstruction for animal mounted wires | Allows for use of techniques that required cabled animals, such as optogenetics, electrophysiology and others |
| 12 zones per side (specular), 40cm² each | Temperature Δ proportionally divided into 12 (in the method paper 15°C/-40°C = 2.27°C per zone) |
| CCD-IR-camera (included in the standard package, with its dedicated support) and ANY-Maze video-tracking software (to be order separatly) | Behavior recorded automatically during test time |
| Heater and cooler units on opposite sides, to establish a symmetric thermal gradient | Gradient setup superior to two-plate choice design |
| Thermal ring-shaped aluminum runway, whith special color and special grip floor. | More sensitive than previous methods: bias-free, reproducible data |
| Designed for tethered and non-tethered mice. (no swivel provided) | For optogenetic, electrophysiology and other tethered animal studies |
| Thermal sensors embedded in the thermal gradient ring sensing the temperature | The exact temperature gradient measured in real time |
| Control ambient temperature | Improve temperature accuracy avoiding laboratory temperature oscillations |

Main References

- · S. Hakim et al., 2025, "Macrophages protect against sensory axon loss in peripheral neuropathy", Nature
- A. Tinajero et al., 2025, "Spontaneous and pharmacologically induced hypothermia protect mice against endotoxic shock", British Journal of Pharmacology
- · P. De Melo et al. 2025, "Non-invasive and unbiased assessment of thermogenesis in mice through thermal gradient ring", bioRxiv
- T. Ujisawa et al., 2024, "Thermal gradient ring for analysis of temperature-dependent behaviors involving TRP channels in mice", The Journal of Physiological Sciences
- P. Sankina et al., 2024, "Topical menthol, a pharmacological cold mimic, induces cold sensitivity, adaptive thermogenesis and brown adipose tissue activation in mice", Diabetes, Obesity, Metabolism
- L. E. Hastings et al., 2024, "Cold nociception as a measure of hyperalgesia during spontaneous heroin withdrawal in mice", Pharmacology Biochemistry and Behavior
- · C. M. Gaffney et al., 2024, "Inflammatory Neuropathy in Mouse and Primate Models of Colorectal Cancer", bioRxiv
- M. Tominaga et al., 2023, "Involvement of skin TRPV3 in temperature detection regulated by TMEM79 in mice", Nature Communications
- A. Vogel et al., 2023, "Repetitive and compulsive behavior after Early-Life-Pain associated with reduced long-chain sphingolipid species", Cell & Bioscience
- L. Valek, et al. 2022, "Cold avoidance and heat pain hypersensitivity in neuronal nucleoredoxin knockout mice", Elsevier
- · S. Sasajima et al., 2022, "Thermal gradient ring reveals thermosensory changes in diabetic peripheral neuropathy in mice", Nature
- Y. Xue et al., 2022, "<u>The Human SCN9ARIBSH Point Mutation Induces Pain Hypersensitivity and Spontaneous Pain in Mice</u>", Frontiers in Molecular Neuroscience
- T. Ujisawa et al., 2022, "Thermal gradient ring reveals different temperature-dependent behaviors in mice lacking thermosensitive TRP channels", The Journal of Physiological Sciences
- I. Tegeder et al., 2022, "Optogenetic Early Life Pain leads to cortical hyperexcitability, nociceptive hypersensitivity and repetitive behavior"
- L. Valek et al. 2021, "Prodromal sensory neuropathy in Pink1±SNCA^{453I} double mutant Parkinson mice", Neuropathology and Applied Neurobiology
- A. Bertamino et al., 2020, "Exploration of TRPM8 Binding Sites by β-Carboline-Based Antagonists and Their In Vitro Characterization and In Vivo Analgesic Activities", Journal of Medical Chemistry
- Z. Winter et al., 2017, "<u>Cold Temperature Encoding by Cutaneous TRPA1 and TRPM8-Carrying Fibers in the Mouse</u>", Frontiers in Molecular Neuroscience
- F. Touska et al., 2016, "Comprehensive thermal preference phenotyping in mice using a novel automated circular gradient assay." Journal Temperature

Specifications - Operation

Ring temperature range Heating Plate: from 20°C to 65°C - Heating/cooling Plate: from 4°C to 65°C

By 4 thermocouples monitored in real time by ANY-maze software Temperature feedback Animal detection Via ANY-maze specific protocol for TGR through integrated USB camera

Illumination Set of 4 dual visible /IR light

Power Universal input 85-264 VAC, 50-60Hz, 400W max

Physical

Aluminium runway Internal diameter 45 cm; External diameter 57,5 cm; Corridor width 6 cm

Maze wall height 15 cm (standard); 25 cm (optional)

Dimensions 76x60x60(h)cm Weight 49.5 Kg

Shipping weight 69.5 Kg

120x80x70(h)cm (wooden fireproof crate with pallet) **Packing**

Ordering informations

Set-up for Thermal Gradient Ring (Zimmermann's method), including heating and cooling elements, circular 35530

corridor with low maze walls (15cm), thermal probes, USB camera, ready for tethered and non-tethered mice.

ANY-maze software not included (required) available in TGR limited version or full version.

Software (REQUIRED; choose one)

60000-TG ANY-maze software, Thermal Gradient Ring specific version (limited TGR TEST ONLY) 60000 ANY-maze software full license (TGR and all other ANY-maze test included in the full version)

Optional items

Thermal conditioned cabinet ready to hold 2 TGR devices (for USA 220/240 Volt US plug). Temperature range 35580-US

from -10 up to 100 °C

Thermal conditioned cabinet ready to hold 2 TGR devices (for Europe 220/240 Volt EU plug). Temperature 35580-EU

range from -10 up to 100 °C

35530-003 Thermal Gradient ring high maze walls (25cm)

Extra warranty (standard 12 months + 12 months with product registration)

35530-UBC12 UB Care 12 Additional hardware warranty extension 12 months for TGR (valid for SKU 35530) 35530-UBC24 UB Care 24 Additional hardware warranty extension 24 months for TGR (valid for SKU 35530)

Related Products



Hot/Cold Plate SKU 35300



Thermal Place Preference SKU 35350



Plantar Test for Thermal Stimulation SKU 35750



Orofacial Stimulation Test SKU 31300



Tail Flick SKU 37560

ugobasile.com

more than 40,000 citations in the main bibliographic search engines.

Rev2.0 March 2025



Ugo Basile SRL

Via Giuseppe Di Vittorio, 2 21036 Gemonio (VA) ITALY Tel. +39 0332 744574

Get a quote: sales@ugobasile.com



Partner area